Supplementary instructions

Plug connector ISO 4400

for level sensors

Contents

1 For your safety
1.1 Appropriate use ... 3
1.2 General safety instructions ... 3
1.3 Safety instructions for Ex areas ... 3

2 Connecting to power supply
2.1 Wiring plan ... 4

3 Supplement
3.1 Technical data ... 5

30380-EN-140801

1 For your safety

1.1 Appropriate use

The plug connectors belong to the accessories for level, switching and pressure sensors. They provide a detachable connection to power supply/signal processing for level switches.

1.2 General safety instructions

The safety information in the operating instructions manual of the respective sensor must be noted.

1.3 Safety instructions for Ex areas

Please note the Ex-specific safety information for installation and operation in Ex areas. These safety instructions are part of the operating instructions manual and come with the Ex-approved instruments.

For instruments with Exd or StEx approval, the use of plug connectors is not allowed.

30380-EN-140801

2 Connecting to power supply

2.1 Wiring plan

Each respective wiring plan shows the assignment of the individual pins of the plug connector to the respective signal outputs. The chart shows the assignment of the individual contact pins to the terminals of the sensor electronics.

Two-wire output, contactless electronic switch, NAMUR output

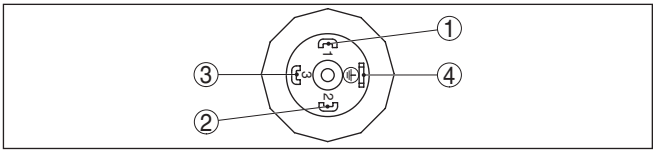

Fig. 1: Top view of the plug connector

1 + (Pin 1)
2 - (Pin 2)
3 free (Pin 3)
4 Screen (Pin 4)

Contact pin	Colour - connection cable	Terminal, electronics module
Pin 1	Black	1
Pin 2	Blue	2
Pin 4	Green/yellow	⏚

3 Supplement

3.1 Technical data

Materials	
Contact support	Polyamide
Contact surface	Sn
Housing	Polyamide
Housing seal	NBR

Temperature range	
Plug connector - separate	-25 … +125 °C (-13 … +257 °F)
Plug - mounted on the sensor	the lowest temperature is applicable

Electrical data	
Rated current	16 A
Reference voltage	250 V AC

Protection rating	
Plug connector - separate (connected status)	IP 65
Plug connector - mounted on the sensor (connected status)	The lowest protection category applies

30380-EN-140801

30380-EN-140801

Printing date:

All statements concerning scope of delivery, application, practical use and operating conditions of the sensors and processing systems correspond to the information available at the time of printing.
Subject to change without prior notice

© VEGA Grieshaber KG, Schiltach/Germany 2014

30380-EN-140801

VEGA Grieshaber KG
Am Hohenstein 113
77761 Schiltach
Germany

Phone +49 7836 50-0
Fax +49 7836 50-201
E-mail: info.de@vega.com
www.vega.com